


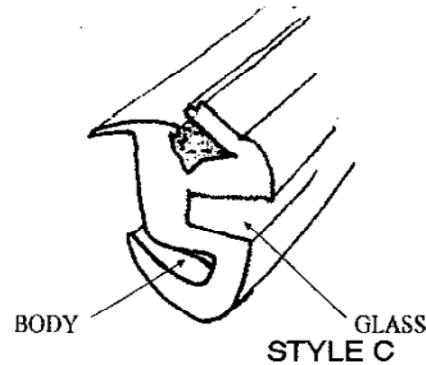

Installation

Clean glass thoroughly.

Install the gasket on the vehicle body making sure the corners are aligned properly.

For gaskets without corners, make sure you place the vulcanized seam in the bottom middle of the glass.

Slide the glass into the gasket across the bottom and into the glass groove.

Spray the gasket a soapy water solution to help ease the installation.

Using a windshield stick work the gasket over the edge of the glass across the bottom first then up the sides and across the top. Patting the glass gently with a flat palm as you go. Be patient in the corners they can be tricky.

Once the glass is in place lock the channel by tucking in the self locking strip into itself all around the gasket.

Note: Windshield installations after 1978 should be sealed with a urethane adhesive.
Follow the urethane adhesives manufacturer's installation procedures.